



Plusieurs grandes tailles sont disponible. Angle à 45 degrés uniquement.


It is mitred corner there is no round corner alternative. After the side profiles are closed, rubber which is inside swingmaster combines the corners through dilating slowly. Easy to open snap frame includes the anti-reflex cover as suitable for external use when equipped with water wick. Can be used as double sided. Steel springs provide flexibility to keep it stable. Each swing master packed an unassembled.

STOP-TROTTOIR A RESSORT

SWING MASTER

MATERIAL: Silver anodised aluminium					WEIGHT		PACKING SIZE
ARTICLE	EXTERNAL (x-y)	POSTER	COPY	H1	WITHOUT PACKING	WITH PACKING	*W X H X D
UASMD00NA1	666 X 913 mm	594 X 841 mm	576 X 823 mm	1150 mm	13,050 kg	14,100 kg	1200 X 800 X 75 mm
UASMD00NA0	913 X 1261 mm	841 X 1189 mm	823 X 1171 mm	1500 mm	17,800 kg	19,800 kg	1500 X 1000 X 75 mm
UASMD00NB2	572 X 772 mm	500 X 700 mm	482 X 682 mm	1010 mm	11,500 kg	12,250 kg	1500 X 620 X 75 mm
UASMD00NB1	772 X 1072 mm	700 X 1000 mm	682 X 982 mm	1310 mm	15,680 kg	17,500 kg	1350 X 830 X 75 mm
UASMD00NB0	1072 X 1472 mm	1000 X 1400 mm	982 X 1382 mm	1710 mm	23,750 kg	25,750 kg	1700 X 1200 X 75 mm
UASMD00N23	580 X 834 mm	508 X 762 mm	490 X 744 mm	1072 mm	12,000 kg	13,000 kg	1150 X 650 X 75 mm
UASMD00N34	834 X 1088 mm	762 X 1016 mm	744 X 998 mm	1326 mm	16,750 kg	18,500 kg	1350 X 900 X 75 mm
UASMD00N46	1088 X 1596 mm	1016 X 1524 mm	998 X 1506 mm	1834 mm	25,000kg	27,500 kg	1800 X 1200 X 75 mm

*W:Width H: Height D: Depth

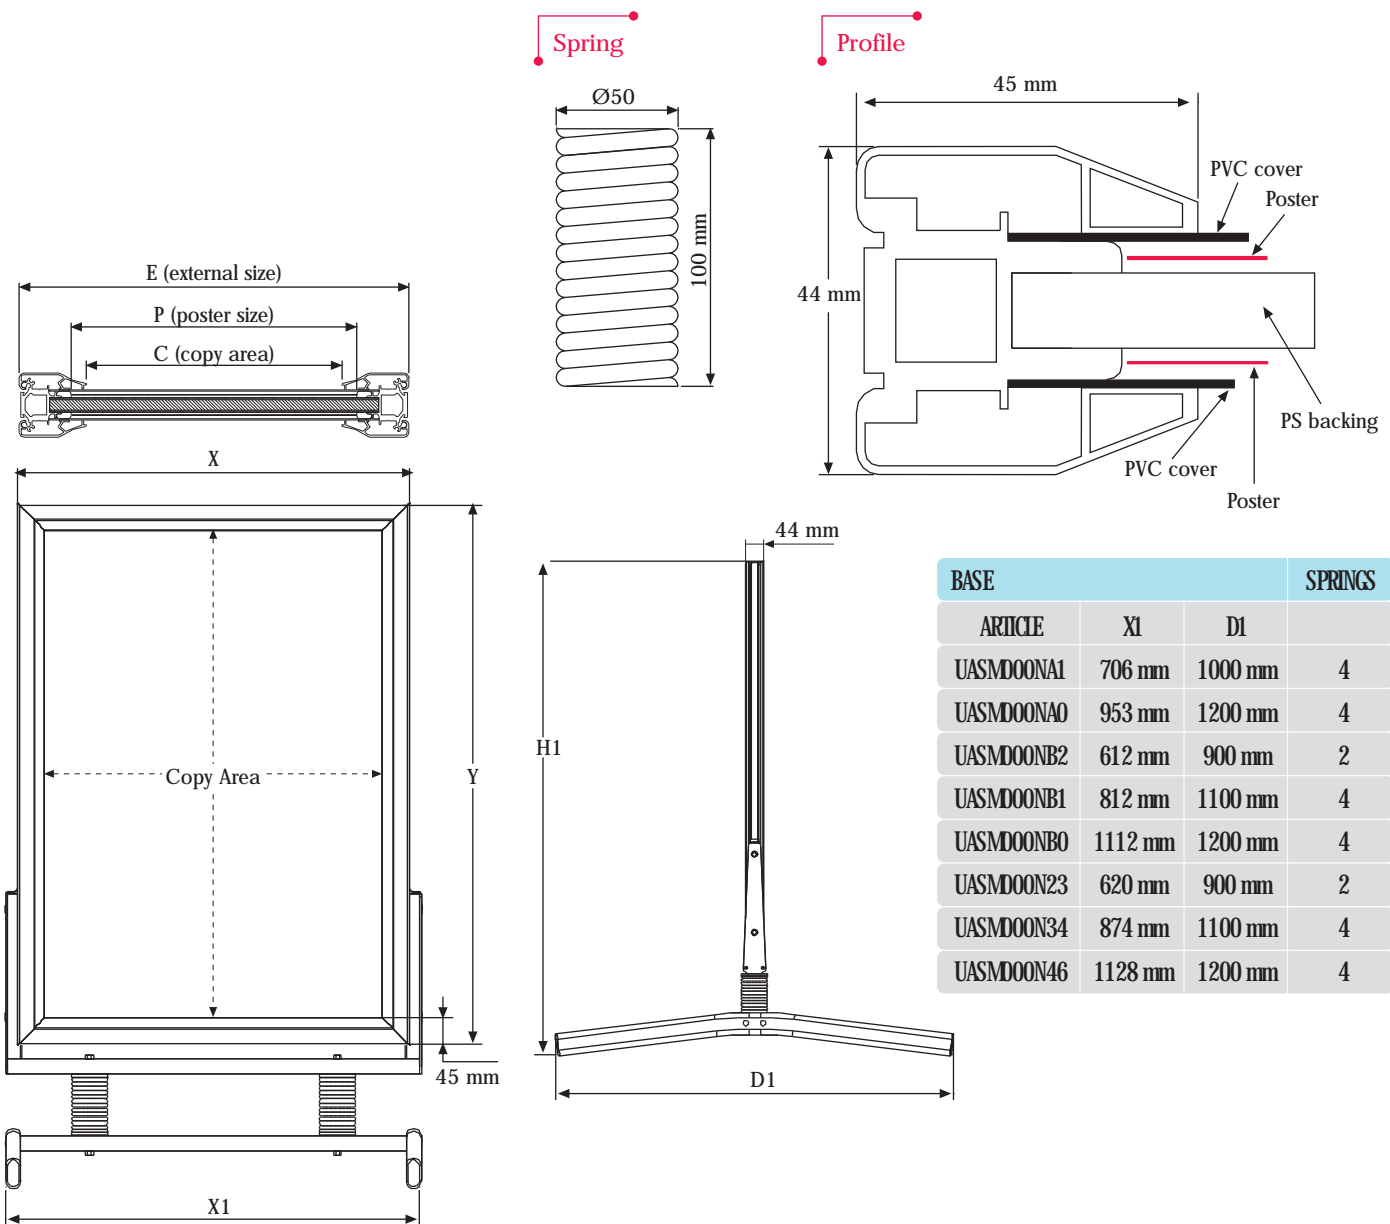

BASE			SPRINGS
ARTICLE	X1	D1	
UASMD00NA1	706 mm	1000 mm	4
UASMD00NA0	953 mm	1200 mm	4
UASMD00NB2	612 mm	900 mm	2
UASMD00NB1	812 mm	1100 mm	4
UASMD00NB0	1112 mm	1200 mm	4
UASMD00N23	620 mm	900 mm	2
UASMD00N34	874 mm	1100 mm	4
UASMD00N46	1128 mm	1200 mm	4

Livré en kit avec la notice de montage.
The product is packed unassembled.

